

IPE MODULAR DECK TILES

MRP Supports' Ipe Deck Tiles are offered with a smooth deck board surface only and have the following coefficient of friction ratings.

Static: Wet - .615FP


Dynamic:Wet - .43FP

Grooved decking surfaces are not recommended...Why?


Grooved surfaces reduce surface area contact with a shoe and are more difficult to clean supporting the collection of food and dirt which encourages fungi growth further reducing slip resistance. MRP Supports' Deck Tiles are rated to carry a live load of 100 psf.

*Use of Cleaning or Finishing products on Iron Woods® Deck Tiles in roof applications is not recommended without consulting product manufactures due to potential risk to EPDM or other roof substrates.

TOP



24x24

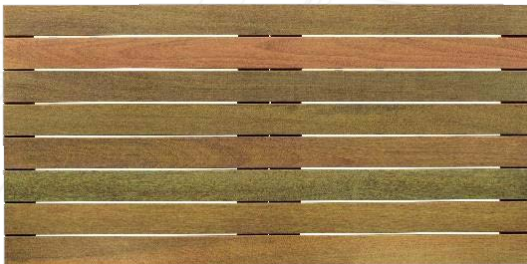

24x48



24x72

BOTTOM



24x24



24x48



24x72